

ProBlue® 30 and 50 Adhesive Melters




30 and 50 liter melters

Nordson ProBlue melters are simple, compact and designed to maximize uptime and reduce operating costs. These rugged, flexible, non-handed melters fit virtually any packaging line.

ProBlue melters:

- Simplify daily operations
- Cost less to maintain
- Install quickly and easily

Two stage melt zones help reduce char build-up in the tank and provide stable manifold outlet temperatures




Easy-to-use controls



Status-at-a-glance indicators highlight: ready, fault, service and temperature status for tank, hose and gun

Service indicators simplify maintenance scheduling



Filter Replacement Indicator



Low-level Adhesive Indicator



Automatic pressure discharge (APD) valve safely relieves pressure into the tank in seconds




Disposable filter eliminates routine filter flushing

ProBlue® 30 and 50 Adhesive Melters

Specifications

Type of System	Non-circulating tank (SP-style piston pump)
Maximum Pump Rate	Ratio: 16:1
High Output Dual-Acting	Maximum Output: 60 kg/hr (130 lb/hr)
Hose Ports	9
Filter Type	Saturn® basket-style filter
Maximum Working Hydraulic Pressure	10 MPa (1450 psi)
Temperature Range	40 to 230°C (100 to 450°F)
Ambient Temp. Range	0 to 50°C (32 to 122°F)
Temp. Control Stability	±0.5°C (1°F)
Electrical Service Standard	200 to 240 VAC 3 phase 50/60 Hz 400/230 VAC (3 phase N/PE) 50/60 Hz
w/Optional 1 phase*	200 to 240 VAC 1 phase 50/60 Hz 200 to 240 VAC (1 phase N/PE) 50/60 Hz

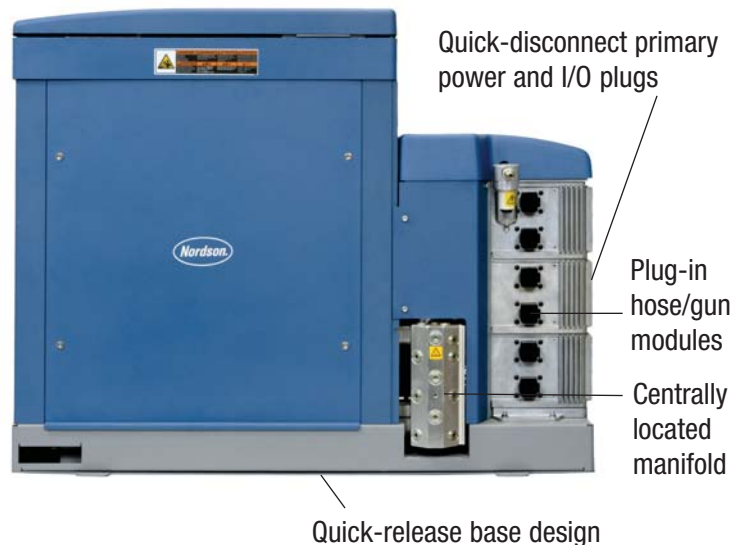

Maximum System Power Capacity at 240 VAC	
2 hoses/guns	6000 watts
4 hoses/guns	8000 watts
6 hoses/guns	10,000 watts
Input/Output Capability Standard	3 standard outputs - programmable for function 4 standard inputs - programmable for function

Mount Dimensions 669 x 249 mm (26.3 x 9.8 in)

Holding Capacity	ProBlue 30 30 L (1,831 in ³) 29 kg (64 lb)	ProBlue 50 50 L (3,051 in ³) 48.5 kg (107 lb)
Melt Rate (per hour)	27 kg (60 lb)	28.6 kg (63 lb)
Throughput (per hour)	27 kg (60 lb)	28.6 kg (63 lb)
Weight (empty)	81.6 kg (180 lb)	87 kg (192 lb)

Dimensions – Unit		
Width	952 mm (37.5 in)	952 mm (37.5 in)
Height	548 mm (21.6 in)	751 mm (29.6 in)
Depth	345 mm (13.6 in)	345 mm (13.6 in)

Dimensions – Installation		
Width	1044 mm (41.1 in)	1044 mm (41.1 in)
Height	859 mm (33.8 in)	1062 mm (41.8 in)
Depth	392 mm (15.4 in)	392 mm (15.4 in)

*Single phase: Maximum 4 hose/gun capacity



For more information, talk with your Nordson representative or contact your Nordson regional office.

United States Duluth, Georgia Telephone: (800) 683-2314 Toll-free Facsimile: (866) 667-3329	Canada Markham, Ontario Telephone: (800) 463-3200 Facsimile: (905) 475-8821	Europe Lüneburg, Germany Telephone: (49) 4131-894-0 Facsimile: (49) 4131-894-149	Japan Tokyo, Japan Telephone: (81) 3-5762-2700 Facsimile: (81) 3-5762-2701	Asia/Australia/ Latin America Amherst, Ohio Telephone: (440) 985-4797 Facsimile: (440) 985-1096
----------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------

www.nordson.com



When you expect more.®